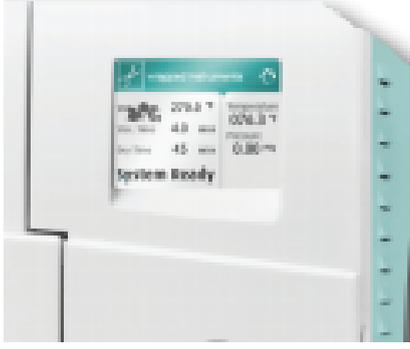


Comparison Table of:

	Midmark M11 Ultraclave	Tuttnauer Tvet 11E
Appearance		
Chamber Size	11" x 18"	11" x 19.8"
Volume	6.5 gal (24.6 Liters)	7.5 gal (28.5 Liters) (Largest capacity in Table Top market)
Design	Old-fashioned	Modern, new, sleek look
Warranty	1 year	2 years parts & labor 10-year chamber warranty
Standards	No mention of ANSI/AAMI ST55 standard	Designed to meet the most current sterilization standards (ANSI/AAMI ST55)
Display	1 color LCD <i>Each time power is reconnected, the display panel will show:</i>  <i>Total cycles run on the sterilizer</i>	3.5" multi-color screen (Easy reading even from distance) 
Trays	4 (2 large & 2 small)	5 large trays plus 1 pouch rack
Cassettes	4 full size and 4 small (less than half) (requires accessory rack)	4 full size standard plus 4 half sized standard cassettes (the included tray rack is rotated 90°)

Comparison Table of:

	Midmark M11 Ultraclave	Tuttnauer Tvet 11E
Tray handle for removing hot trays	Optional	Included
Pouch rack for standing pouches	Optional	Included
Heating Element	Located inside the chamber at the bottom, takes away from sterilization capacity	Located outside the chamber to maximize sterilization capacity
Drying	Open door drying	New  autoclaves have an enhanced drying cycle that ensures double-wrapped packs are dry. Drying starts automatically with the door closed, maintaining sterility and ensures efficient drying
Door	Automatic/Manual opening	Automatic-Self Locking door system
Cycle History	N/A	100 cycles that can be stored for reprinting or downloading to PC
USB port	None	Yes. USB port enables users to easily transfer cycle data via a flash drive to PC
Network Port	None	Yes. Network Port allows for connection to local network and allows remote monitoring of the system (optional RPCR software)
Printer	Optional (external)	Optional (internal)
Cycles	4	4 FDA cleared And a dedicated cleaning cycle
Custom cycles	Customize included cycles with limited changes	2 built-in full access custom cycles and up to 20 more possible. Extreme customization possible.
Water reservoir capacity	1.4 gal. (5.3 liters)	1.6 gal. (6.2 liters) – enough to run 15-25 cycles
LCD informs user when a simple maintenance check is necessary	No	Yes (programmable setting)
Shipping weight	131lbs (59.5kg)	122lbs (55.3kg)